


Culvert and Access Permit

8348 CTR T, Larsen WI 54947
 Winnebago County
 920-836-2007
 toc@new.rr.com

Date: _____ Tax ID #: _____

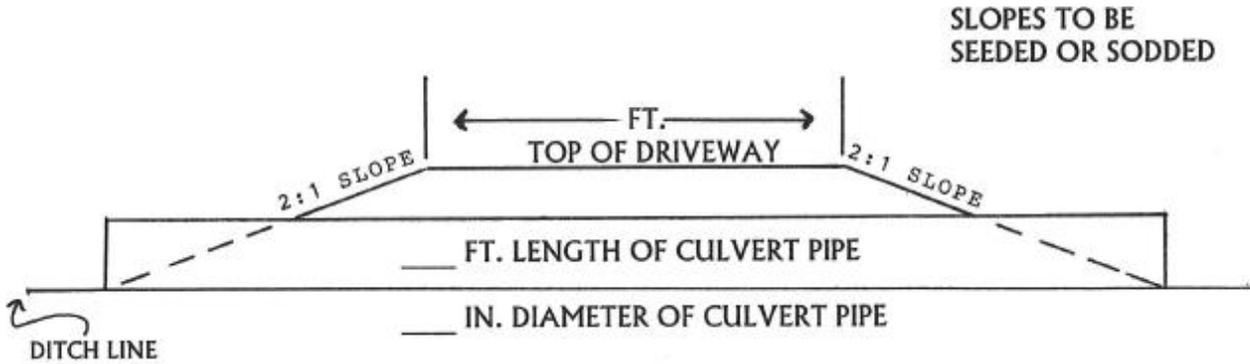

1. Culverts must be new corrugated metal pipes with end walls.
2. Culverts minimum length: 30' X 18" or 30' X 15" X 21".
3. Culverts for a single access (12' lane) driveway may be 20' X 18" or 20' X 15" X 21".
4. When the upstream and downstream culverts are larger than 18" in diameter, the diameter of the new culvert shall be the average of the two upstream and two downstream culverts.
5. All culverts shall be installed with the flow line of the culvert at the flow line of the stormwater management ditch.
6. All culverts shall be bedded in 12 inches of ¾ inch clear stone with the clear stone extended 3-feet past the end of the pan of the culvert end wall.
7. All culverts shall have a minimum of 12 inches of cover.
8. Existing single lane driveways may use a minimum of a 22-foot culvert with end walls.

PLEASE BE ADVISED: The Property Owner will be **SPECIAL ASSESSED** for the actual cost of repairing any damage that occurs to the Town's Public Infrastructure as a result of the installation of any culvert or construction of a new home in the Town of Clayton.

Culvert/Access Permit Location: _____

Applicant NAME: _____

Present ADDRESS: _____

PHONE: _____

Approved: _____

Date: _____

Permit Charge: _____

Access Permit Charge: _____